

A posteriori error estimation for incompressible viscous fluid with a new boundary condition

Abstract This paper describes numerical solutions of incompressible Navier-Stokes equations with a new boundary condition. To solve this problem, we use the discretization by mixed finite element method. We use a vector extrapolation method for computing numerical solutions of the steady-state Navier-Stokes equations. In addition, two types of a posteriori error indicator are introduced and are shown to give global error estimates that are equivalent to the true error. A numerical experiment on the driven cavity flow is given to demonstrate the effectiveness of the vector extrapolation method. We compare the result with the solution from commercial code like ADINA system as well as with values from other simulations.

Keywords Navier-Stokes Equations, Finite Element Method, Vector extrapolation, A posteriori error estimation, Adina system

MR(2010) Subject Classification 05B05, 05B25, 20B25

1 Introduction

The idea of mixed finite element is to approximate simultaneously the piezometric head and the velocity. This approximation gives velocity throughout the field and the normal component of the velocity is continuous across the inter-element boundaries. Moreover, with the mixed formulation, the velocity is defined with the help of Raviart Thomas basis functions [1, 2, 3, 45] and, therefore, a simple integration over the element gives the corresponding streamlines. This method was widely used for the prediction of the behavior of fluid in the hydrocarbons tank.

In computational mechanics one usually faces the problem of increasing the accuracy of a solution without adding unnecessary degrees of freedom. It is, therefore, necessary to update the mesh to ensure that it becomes fine enough in the critical regions while remaining reasonably coarse in the rest of the domain. Local a posteriori error estimator is the adequate tool for identifying these critical regions automatically, using an input information only the given data and the numerical solution itself. A large amount of work has already been done in the construction of error estimators for several problems of computational fluid dynamics. In the conforming case there are several ways to define error estimators by using the residual equation. Ainsworth and Oden [5] and Verfurth [6] give a general overview. In the specific case of the Stokes and Navier-Stokes equations governing the steady flow of a viscous incompressible fluid, the work of Bank and Welfert [7], Verfurth [8] and Oden and Ainsworth [9] laid the basic foundation for the mathematical analysis of practical methods. Other works for the stationary Navier-Stokes problem have been introduced in [10, 11, 12, 13, 14, 15, 16].

In this paper we explore the potential of vector extrapolation in the context of computing steady state solutions of incompressible Navier-Stokes equations. Spatial discretization using mixed approximation of the velocity and pressure variables naturally lead us to consider high-dimensional nonlinear algebraic systems-so effective iteration methods are crucial for efficient computation. Existing vector extrapolation methods can be broadly classified into two categories: polynomial methods and ε -algorithms. The first family includes three approaches: minimal polynomial extrapolation (MPE) of Cabay and Jackson [17]; reduced rank extrapolation (RRE) of Eddy [18] and Mesina [19], and the modified minimal polynomial extrapolation (MMPE) derived in [20, 21, 22]. The second family includes the topological ε -algorithm (TEA) and the scalar and vector ε -algorithms (SEA and VEA). We will restrict our attention to the RRE methodology in this work.

Some different recursive algorithms for implementing these methods have been presented in [23, 31, 33]. We note that, when applied to linearly generated vector sequences, the MPE, the RRE and the TEA methods are related to Krylov subspace methods.

The plan of the paper is as follows. The model problem is described in section 2, followed by the discretization by mixed finite element method in section 3. A vector extrapolation methods is described in section 4. Section 5 shows the methods of a posteriori error estimator of the computed solution and numerical experiment is described in section 6.

2 Governing equations

We consider the steady-state Navier-Stokes equations for a positive constant viscosity ν ,

$$\begin{cases} -\nu \nabla^2 \vec{u} + \vec{u} \cdot \nabla \vec{u} + \nabla p = \vec{f} & \text{in } \Omega \\ \nabla \cdot \vec{u} = 0 & \text{in } \Omega \\ \alpha \vec{u} + (\nu \nabla \vec{u} - pI) \vec{n} = \vec{g} & \text{in } \Gamma =: \partial\Omega \text{ and } \int_{\Omega} p \, dx = 0, \end{cases} \quad (2.1)$$

where \vec{u} is the fluid velocity, p is the pressure field, ∇ is the gradient, $\nabla \cdot$ is the divergence operator, \vec{n} denote the outward pointing normal to the boundary and α is a nonzero bounded continuous function defined on $\partial\Omega$.

This system is the basis for computational modeling of the flow of an incompressible Newtonian fluid such as air or water. The presence of the nonlinear convection term $\vec{u} \cdot \nabla \vec{u}$ means that boundary value problems associated with the Navier-Stokes equations can have more than one solution.

We set

$$V = H_0^1(\Omega) \times H_0^1(\Omega), \quad (2.2)$$

and

$$W = \{q \in L^2(\Omega) : \int_{\Omega} q(x) dx = 0\}. \quad (2.3)$$

Let the bilinear forms $a : V \times V \rightarrow \mathbb{R}$, $b : V \times W \rightarrow \mathbb{R}$, $d : W \times W \rightarrow \mathbb{R}$, and the trilinear form $c : V \times V \times V \rightarrow \mathbb{R}$

$$a(\vec{u}, \vec{v}) = \nu \int_{\Omega} \nabla \vec{u} \cdot \nabla \vec{v} \, dx + \int_{\Gamma} \alpha \vec{u} \cdot \vec{v}, \quad b(\vec{v}, q) = - \int_{\Omega} (q \nabla \cdot \vec{v}) \, dx, \quad d(p, q) = \int_{\Omega} p \, q \, dx, \quad (2.4)$$

$$c(\vec{z}, \vec{u}, \vec{v}) = \int_{\Omega} (\vec{z} \cdot \nabla \vec{u}) \cdot \vec{v}. \quad (2.5)$$

These inner products induce norms on V and W denoted by $\|\cdot\|_V$ and $\|\cdot\|_W$ respectively.

$$\|\vec{v}\|_V = a(\vec{u}, \vec{u})^{\frac{1}{2}} \quad \forall \vec{u} \in V, \quad (2.6)$$

$$\|q\|_W = d(q, q)^{\frac{1}{2}} \quad \forall q \in W. \quad (2.7)$$

Given the continuous functional $l : V \rightarrow \mathbb{R}$

$$l(\vec{v}) = \int_{\Omega} \vec{f} \cdot \vec{v} \, dx. \quad (2.8)$$

Then the standard weak formulation of the Navier-Stokes flow problem (2.1) is the following:

Find $(\vec{u}, p) \in V \times W$ such that

$$a(\vec{u}, \vec{v}) + b(\vec{v}, p) + c(\vec{u}, \vec{u}, \vec{v}) = l(\vec{v}), \quad (2.9)$$

$$b(\vec{u}, q) = 0, \quad (2.10)$$

for all $(\vec{v}, q) \in V \times W$.

Let the subspace of divergence-free velocities be given by

$$V_{E_0} = \{\vec{z} \in V; \vec{z} \cdot \vec{n} = 0 \text{ and } \nabla \cdot \vec{z} = 0 \text{ in } \Omega\}. \quad (2.11)$$

We have $c(\vec{z}; \vec{u}, \vec{v}) = -c(\vec{z}; \vec{v}, \vec{u})$ in V_{E_0} .

We obtain

$$c(\vec{z}; \vec{u}, \vec{u}) = 0 \quad \forall \vec{z} \in V_{E_0}. \quad (2.12)$$

The problem (2.9)-(2.10) is known [35] to possess a unique solution whenever the data is sufficiently small. In particular, if there exists a constant C such that

$$l(\vec{v}) \leq \omega \frac{\nu^2}{C} |\vec{v}|_{H^1(\Omega)} \quad \forall \vec{v} \in V, \quad (2.13)$$

for some fixed $\omega \in [0, 1)$.

Then, there is a unique solution $\vec{u} \in V$ satisfying

$$|\vec{u}|_{H^1(\Omega)} \leq \omega \frac{\nu}{C}. \quad (2.14)$$

3 Mixed finite element discretization

Let P be a regular partitioning of the domain Ω into the union of N subdomains K such that

- $N < \infty$,
- $\bar{\Omega} = \cup_{K \in P} \bar{K}$,
- $K \cap J$ is empty whenever $K \neq J$,
- each K is a convex Lipschitzian domain with piecewise smooth boundary ∂K .

The common boundary between subdomains K and J is denoted by: $\Gamma_{KJ} = \partial K \cap \partial J$.

The finite element subspaces X^h and M^h are constructed in the usual manner so that the inclusion

$X^h \times M^h \subset V \times W$ holds.

The finite element approximation to (2.9)-(2.10) is then

Find $(\vec{u}_h, p_h) \in X^h \times M^h$ such that

$$a(\vec{u}_h, \vec{v}_h) + b(\vec{v}_h, p_h) + c(\vec{u}_h, \vec{u}_h, \vec{v}_h) = l(\vec{v}_h), \quad (3.1)$$

$$b(\vec{u}_h, q_h) = 0, \quad (3.2)$$

for all $(\vec{v}_h, q_h) \in X^h \times M^h$.

We define the appropriate bases for the finite element spaces, leading to a non linear system of algebraic equations. Linearization of this system using Newton iteration gives the finite dimensional system:

Find $\delta \vec{u}_h \in X^h$ and $\delta p_h \in M^h$ such that

$$\nu \int_{\Omega} \nabla \delta \vec{u}_h : \nabla \vec{v}_h + \int_{\partial\Omega} \alpha \delta \vec{u}_h \cdot \vec{v}_h + c(\delta \vec{u}_h, \vec{u}_h, \vec{v}_h) + c(\vec{u}_h, \delta \vec{u}_h, \vec{v}_h) + b(\vec{v}_h, \delta p_h) = R_k(\vec{v}_h), \quad (3.3)$$

$$b(\delta \vec{u}_h, q_h) = r_k(q_h), \quad (3.4)$$

for all $\vec{v}_h \in X^h$ and $q_h \in M^h$,

where $R_k(\vec{v}_h)$ and $r_k(q_h)$ are the non linear residuals associated with the discrete formulations (3.1)-(3.2) for the iterate (\vec{u}_k, p_k) .

To define the corresponding linear algebra problem, we use a set of vector-valued basis functions $\{\vec{\varphi}_j\}$, so that

$$\vec{u}_h = \sum_{j=1}^{n_u} u_j \vec{\varphi}_j + \sum_{j=n_u+1}^{n_u+n_{\partial}} u_j \vec{\varphi}_j, \quad \delta \vec{u}_h = \sum_{j=1}^{n_u} \Delta u_j \vec{\varphi}_j, \quad (3.5)$$

and we fix the coefficients $u_j : j = n_u + 1, \dots, n_u + n_{\partial}$, so that the second term interpolates the boundary data on $\partial\Omega_D$.

We introduce a set of pressure basis functions $\{\Psi_k\}$ and set

$$p_h = \sum_{k=1}^{n_p} p_k \Psi_k, \quad \delta p_h = \sum_{k=1}^{n_p} \Delta p_k \Psi_k, \quad (3.6)$$

where n_u and n_p are the numbers of velocity and pressure basis functions, respectively.

We obtain a system of linear equations

$$\begin{pmatrix} A + N + W & {}^t B \\ B & 0 \end{pmatrix} \begin{pmatrix} \Delta U \\ \Delta P \end{pmatrix} = \begin{pmatrix} f \\ g \end{pmatrix}. \quad (3.7)$$

This system is referred to as the discrete Newton problem.

The matrix A is the vector Laplacian matrix and B is the divergence matrix

$$A = [a_{ij}], \quad a_{ij} = \nu \int_{\Omega} \nabla \vec{\varphi}_i : \nabla \vec{\varphi}_j + \int_{\partial\Omega} \alpha \vec{\varphi}_i \cdot \vec{\varphi}_j, \quad (3.8)$$

$$B = [b_{kj}], \quad b_{kj} = - \int_{\Omega} \Psi_k \nabla \cdot \vec{\varphi}_j, \quad (3.9)$$

for i and $j = 1, \dots, n_u$ and $k = 1, \dots, n_p$.

The vector-convection matrix N and the Newton derivative matrix W are given by

$$N = [n_{ij}], \quad n_{ij} = \int_{\Omega} (\vec{u}_h \cdot \nabla \vec{\varphi}_j) \cdot \vec{\varphi}_i, \quad (3.10)$$

$$W = [W_{ij}], \quad W_{ij} = \int_{\Omega} (\vec{\varphi}_j \cdot \nabla \vec{u}_h) \cdot \vec{\varphi}_i, \quad (3.11)$$

for i and $j = 1, \dots, n_u$.

The Newton derivative matrix is symmetric.

The right-hand side vectors in (3.7) are the non linear residuals associated with the discrete solution \vec{u}_h, p_h and the function α ,

$$f = [f_i], \quad f_i = \int_{\Omega} \vec{f} \cdot \vec{\varphi}_i - \int_{\Omega} (\vec{u}_h \cdot \nabla \vec{u}_h) \cdot \vec{\varphi}_i - \nu \int_{\Omega} \nabla \vec{u}_h : \nabla \vec{\varphi}_i - \int_{\Gamma} \alpha \vec{u}_h \cdot \vec{\varphi}_i + \int_{\Omega} p_h (\nabla \cdot \vec{\varphi}_i) \quad (3.12)$$

$$g = [g_k], \quad g_k = - \int_{\Omega} \Psi_k (\nabla \cdot \vec{u}_h), \quad (3.13)$$

for $i = 1, \dots, n_u$ and $k = 1, \dots, n_p$.

For Picard iteration, we give the discrete problem

$$\begin{pmatrix} A + N & {}^t B \\ B & 0 \end{pmatrix} \begin{pmatrix} \Delta U \\ \Delta P \end{pmatrix} = \begin{pmatrix} f \\ g \end{pmatrix}. \quad (3.14)$$

The lowest order mixed approximations like $Q_1 - P_0$ and $Q_1 - Q_1$ are unstable. We use a stabilized element pair $Q_1 - P_0$, this is the most famous example of an unstable element pair, using bilinear approximation for velocity and a constant approximation for the pressure.

4 Vector extrapolation methods

We use a vector extrapolation method for computing numerical solutions of the steady-state Navier-Stokes equations. Extrapolation methods are of interest whenever an iteration process converges slowly. For a survey of these methods see for example the papers [31, 32] and the book [33]. The most popular vector extrapolation methods are the minimal polynomial extrapolation (MPE) [17], the reduced rank extrapolation (RRE) [18, 19], and the modified minimal polynomial extrapolation (MMPE) [20, 21, 22]. Convergence analysis of these methods can be found in [23, 24]. In particular, A. Sidi [25] shows that the MPE and the RRE approaches are mathematically equivalent to Arnoldi's method [26] and to the generalized minimal residual method (GMRES) [27], respectively. Vector extrapolation methods are considered to be most effective when applied to nonlinear systems of equations [28, 29, 30, 31]. We use the reduced rank extrapolation method [18, 19].

To define the RRE method, we will consider the solution of the linear or nonlinear system of equations:

$$G(x) = 0, \quad G : \mathbb{R}^N \rightarrow \mathbb{R}^N. \quad (4.1)$$

Let l be the solution of the system (4.1), l_0 be a given initial approximation, and generate the sequence of vectors l_1, l_2, \dots , according to the fixed-point iterative method

$$l_{n+1} = H(l_n), \quad n = 0, 1, \dots \quad H : \mathbb{R}^N \rightarrow \mathbb{R}^N, \quad (4.2)$$

where $x - H(x) = 0$ represents a preconditioned form of (4.1).

Let (l_n) be a given sequence of N -dimensional column vectors formed by (4.2), and $\lim_{n \rightarrow \infty} l_n = l$, we set

$$v_n = \Delta l_n = l_{n+1} - l_n, \quad n = 0, 1, \dots \quad (4.3)$$

$$w_n = \Delta^2 l_n = \Delta l_{n+1} - \Delta l_n, \quad n = 0, 1, \dots \quad (4.4)$$

The RRE method, when applied to the sequence l_n , can be shown to generate an approximation $\xi_{n,k}^{RRE}$ of the limit or the antilimit of (l_n) .

This approximation can be expressed in the form

$$\xi_{n,k}^{RRE} = \sum_{j=0}^k \beta_j^k l_{n+j}, \quad (4.5)$$

where

$$\sum_{j=0}^k \beta_j^{(k)} = 1 \quad \text{and} \quad \sum_{j=0}^{(k)} \theta_{ij} \beta_j^{(k)} = 0, \quad i = 0, \dots, k-1, \quad (4.6)$$

and the scalars θ_{ij} defined by the l^2 inner product:

$$\theta_{ij} = (\Delta^2 l_{n+i}, \Delta l_{n+j}). \quad (4.7)$$

Using (4.5) and (4.6), $\xi_{n,k}^{RRE}$ is given by the ratio of two determinants

$$\xi_{n,k}^{RRE} = \frac{\begin{vmatrix} l_n & l_{n+1} & \cdot & \cdot & \cdot & l_{n+k} \\ \theta_{0,0} & \theta_{0,1} & \cdot & \cdot & \cdot & \theta_{0,k} \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \theta_{k-1,0} & \theta_{k-1,1} & \cdot & \cdot & \cdot & \theta_{k-1,k} \end{vmatrix}}{\begin{vmatrix} 1 & 1 & \cdot & \cdot & \cdot & 1 \\ \theta_{0,0} & \theta_{0,1} & \cdot & \cdot & \cdot & \theta_{0,k} \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \theta_{k-1,0} & \theta_{k-1,1} & \cdot & \cdot & \cdot & \theta_{k-1,k} \end{vmatrix}}. \quad (4.8)$$

Let $\Delta^i L_{n,k-1}$ ($i = 1, 2$) the matrices whose columns are $\Delta^i l_n, \dots, \Delta^i l_{n+k-1}$.

Using Schurs formula, we have

$$\xi_{n,k}^{RRE} = l_n - \Delta L_{n,k-1} \Delta^2 L_{n,k-1}^+ \Delta l_n, \quad (4.9)$$

where $\Delta^2 L_{n,k-1}^+$ is defined by

$$\Delta^2 L_{n,k-1}^+ = (\Delta^2 L_{n,k-1}^T \Delta^2 L_{n,k-1})^{-1} \Delta^2 L_{n,k-1}^T. \quad (4.10)$$

$\xi_{n,k}^{RRE}$ exists and is unique if and only if $\det(\Delta^2 L_{n,k-1}^T \Delta^2 L_{n,k-1}) \neq 0$. We use the algorithms proposed in [23].

5 A posteriori error Analysis

In this section, we propose two types of a posteriori error indicator : the local Poisson problem estimator and the residual error estimator, which are shown to give global error estimates.

Theorem 5.1 *We have*

$$\sup_{(\vec{v}, q) \in V \times W} \frac{a(\vec{w}, \vec{v}) + d(s, q)}{\|\vec{v}\|_V + \|q\|_W} \geq \frac{1}{2}(\|\vec{w}\|_V + \|s\|_W), \quad (5.1)$$

for all $(\vec{w}, s) \in V \times W$.

Proof . Let $(\vec{w}, q) \in V \times W$, we have

$$\sup_{(\vec{v}, q) \in V \times W} \frac{a(\vec{w}, \vec{v}) + d(s, q)}{\|\vec{v}\|_V + \|q\|_W} \geq \frac{a(\vec{w}, \vec{w}) + d(s, 0)}{\|\vec{w}\|_V + \|0\|_W} = \|\vec{w}\|_V, \quad (5.2)$$

and we have

$$\sup_{(\vec{v}, q) \in V \times W} \frac{a(\vec{w}, \vec{v}) + d(s, q)}{\|\vec{v}\|_V + \|q\|_W} \geq \frac{a(\vec{w}, \vec{0}) + d(s, s)}{\|\vec{0}\|_V + \|s\|_W} = \|s\|_W. \quad (5.3)$$

We gather (5.2) and (5.3) to get (5.1).

Let $(\vec{e}, E) \in V \times W$ be the error in the finite element approximation, $\vec{e} = \vec{u} - \vec{u}_h$ and $E = p - p_h$ and define $(\vec{\phi}, \psi) \in V \times W$ to be the Ritz projection of the modified residuals

$$a(\vec{\phi}, \vec{v}) + d(\psi, q) = a(e, \vec{v}) + b(\vec{v}, E) + b(\vec{e}, q) + D(\vec{u}, \vec{u}_h, \vec{v}), \quad (5.4)$$

for all $(\vec{v}, q) \in V \times W$, where $D(\vec{u}, \vec{u}_h, \vec{v}) = c(\vec{u}, \vec{u}, \vec{v}) - c(\vec{u}_h, \vec{u}_h, \vec{v})$.

Theorem 5.2 *Let (2.14) hold. Then there exist positive constants K_1 and K_2 such that*

$$K_1(\|\vec{\phi}\|_V^2 + \|\psi\|_W^2) \leq \|\vec{u} - \vec{u}_h\|_V^2 + \|p - p_h\|_W^2 \leq K_2(\|\vec{\phi}\|_V^2 + \|\psi\|_W^2). \quad (5.5)$$

Proof. See T.J. Oden, W. Wu, and M. Ainsworth [5]. \square

The local velocity space on each subdomain $K \in P$ is

$$V_K = \{\vec{v} \in H^1(K) \times H^1(K) : \vec{v} = \vec{0} \text{ on } \partial\Omega \cap \partial K\}, \quad (5.6)$$

and the pressure space is

$$W_K = L^2(K). \quad (5.7)$$

Let the bilinear forms $a_K : V_K \times V_K \rightarrow \mathbb{R}$, $b_K : V_K \times W_K \rightarrow \mathbb{R}$, $d_K : W_K \times W_K \rightarrow \mathbb{R}$, and the trilinear form $c_K : V_K \times V_K \times V_K \rightarrow \mathbb{R}$

$$a_K(\vec{u}, \vec{v}) = \nu \int_K \nabla \vec{u} \cdot \nabla \vec{v} + \int_{\Gamma \cap K} \alpha \vec{u} \cdot \vec{v} \, dx, \quad b_K(\vec{v}, q) = - \int_K q(\nabla \cdot \vec{v}) \, dx, \quad d_K(p, q) = \int_K p \, q \, dx, \quad (5.8)$$

$$c_K(\vec{z}; \vec{u}, \vec{v}) = \int_K (\vec{z} \cdot \nabla \vec{u}) \cdot \vec{v} \, dx. \quad (5.9)$$

Given the continuous functional $l_K : V_K \rightarrow \mathbb{R}$

$$l_K(\vec{v}) = \int_K \vec{f} \cdot \vec{v} \, dx. \quad (5.10)$$

Hence for $\vec{v}, \vec{w} \in V$ and $q \in W$ we have

$$b(\vec{v}, q) = \sum_{K \in P} b_K(\vec{v}_K, q_K). \quad (5.11)$$

$$a(\vec{v}, \vec{w}) = \sum_{K \in P} a_K(\vec{v}_K, \vec{w}_K). \quad (5.12)$$

$$c(\vec{z}; \vec{u}, \vec{v}) = \sum_{K \in P} c_K(\vec{z}_K, \vec{u}_K, \vec{v}_K). \quad (5.13)$$

$$l(\vec{v}) = \sum_{K \in P} l_K(\vec{v}_K). \quad (5.14)$$

The velocity space $V(P)$ is defined by

$$V(P) = \prod_{K \in P} V_K. \quad (5.15)$$

and the broken pressure space $W(P)$ is defined by

$$W(P) = \{q \in \prod_{K \in P} W_K : \int_{\Omega} q(x) dx = 0\}. \quad (5.16)$$

Examining the previous notations reveals that

$$W(P) = W. \quad (5.17)$$

We consider the space of continuous linear functional τ on $V(P) \times W(P)$ that vanish on the space $V \times W$.

Therefore, let $H(\text{div}, \Omega)$ denote the space

$$H(\text{div}, \Omega) = \{A \in L^2(\Omega)^{2 \times 2} : \text{div}(A) \in L^2(\Omega)^2\}, \quad (5.18)$$

equipped with norm

$$\|A\|_{H(\text{div}, \Omega)} = \{\|A\|_{L^2(\Omega)}^2 + \|\text{div} A\|_{L^2(\Omega)}^2\}^{\frac{1}{2}}. \quad (5.19)$$

Theorem 5.3 *A continuous linear functional τ on the space $V(P) \times W(P)$ vanishes on the space $V \times W$ if and only if there exists $A \in H(\text{div}, \Omega)$ such that*

$$\tau[(\vec{v}, q)] = \sum_{K \in P} \oint_{\partial K} \vec{n}_K \cdot A \cdot \vec{v}_K \, ds, \quad (5.20)$$

where \vec{n}_K denotes the unit outward normal vector on the boundary of K .

Proof. See M. Ainsworth and J. Oden [4]. \square

It will be useful to introduce the stresslike tensor $\sigma(\vec{v}, q)$ formally defined to be

$$\sigma_{ij}(\vec{v}, q) = \nu \frac{\partial v_i}{\partial x_j} - q \delta_{ij}, \quad (5.21)$$

Where δ_{ij} is the Kronecker symbol.

In order to define the value of the normal component of the stress on the interelement boundaries it is convenient to introduce notations for the jump on Γ_{KJ} :

$$[[\vec{v} \cdot \sigma(\vec{v}_h, q_h)]] = \vec{n}_K \cdot \sigma(\vec{v}_{h,K}, q_{h,K}) + \vec{n}_J \cdot \sigma(\vec{v}_{h,J}, q_{h,J}). \quad (5.22)$$

An averaged normal stress on Γ_{KJ} is defined by

$$\langle \vec{n}_K \cdot \sigma(\vec{v}_h, q_h) \rangle = \begin{pmatrix} \alpha_{KJ}^{(1)} & 0 \\ 0 & \alpha_{KJ}^{(2)} \end{pmatrix} \vec{n}_K \cdot \sigma(\vec{v}_{h,K}, q_{h,K}) + \begin{pmatrix} \alpha_{JK}^{(1)} & 0 \\ 0 & \alpha_{JK}^{(2)} \end{pmatrix} \vec{n}_J \cdot \sigma(\vec{v}_{h,J}, q_{h,J}) \quad (5.23)$$

where $\alpha_{KJ}^{(i)} : \Gamma_{KJ} \rightarrow \mathbb{R}$ are smooth polynomial functions. Naturally, the stress should be continuous then it is required that the averaged stress coincide with this value. On Γ_{KJ} , we have

$$\begin{pmatrix} \alpha_{KJ}^{(1)} & 0 \\ 0 & \alpha_{KJ}^{(2)} \end{pmatrix} + \begin{pmatrix} \alpha_{JK}^{(1)} & 0 \\ 0 & \alpha_{JK}^{(2)} \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}. \quad (5.24)$$

The notation $[[\cdot]]$ is used to define jumps in the elements of $V(P)$ between subdomains. We define

$$[[\vec{v}]] = \begin{cases} V_K - V_J, & K > J, \\ V_J - V_K, & K < J, \end{cases} \quad (5.25)$$

and

$$[[\vec{n}]] = \begin{cases} \vec{n}_K - \vec{n}_J, & K > J, \\ \vec{n}_J - \vec{n}_K, & K < J. \end{cases} \quad (5.26)$$

For $\vec{v} \in V(P)$, we have

$$\sum_{K \in P} \oint_{\partial K} \vec{n}_K \cdot \sigma(\vec{u}_h, p_h) \cdot \vec{v} ds = \sum_{\Gamma_{KJ}} \int_{\Gamma_{KJ}} \langle \vec{n}_K \cdot \sigma(\vec{u}_h, p_h) \rangle \cdot [[\vec{v}]] ds. \quad (5.27)$$

Lemma 1. There exists $\hat{\mu} \in H(\text{div}, \Omega)$ such that

$$\hat{\mu}([\vec{w}], q) = \sum_{\Gamma_{KJ}} \int_{\Gamma_{KJ}} \langle \vec{n}_K \cdot \sigma(\vec{u}_h, q_h) \rangle \cdot [[\vec{w}]] ds, \quad (5.28)$$

for all $(\vec{w}, q) \in V(P) \times W(P)$.

Proof. The right-hand side of equation (5.28) vanishes on $V \times W$. Applying theorem 3, we obtain (5.28).

We define the linear functional $R : V(P) \times W(P) \rightarrow \mathbb{R}$ by

$$\begin{aligned} R([\vec{w}], q) &= \sum_{K \in P} \{ l_K(\vec{w}) - a_K(\vec{u}_h, \vec{w}) - b_K(\vec{w}, p_h) - b_K(\vec{u}_h, q) - c_K(\vec{u}_h, \vec{u}_h, \vec{w}) \} \\ &\quad + \oint_{\partial K} \vec{n}_K \cdot \sigma(\vec{u}_h, p_h) \cdot \vec{w}_K ds - \hat{\mu}([\vec{w}], q), \end{aligned} \quad (5.29)$$

for all $(\vec{w}, q) \in V(P) \times W(P)$.

For $(\vec{w}, q) \in V \times W$, we obtain

$$R[(\vec{w}, q)] = a(\vec{\phi}, \vec{w}) + d(\psi, q). \quad (5.30)$$

Let the lagrangian functional $L : V(P) \times W(P) \times H(\text{div}, \Omega) \longrightarrow \mathbb{R}$ such that

$$L[(\vec{w}, q), \mu] = \frac{1}{2} \{a(\vec{w}, \vec{w}) + d(q, q)\} - R[(\vec{w}, q)] - \mu[(\vec{w}, q)], \quad (5.31)$$

So that

$$\sup_{\mu \in H(\text{div}, \Omega)} L[(\vec{w}, q), \mu] = \begin{cases} \frac{1}{2} \{a(\vec{w}, \vec{w}) + d(q, q)\} - R[(\vec{w}, q)] & \text{if } (\vec{w}, q) \in V \times W, \\ +\infty & \text{otherwise,} \end{cases} \quad (5.32)$$

and, for $(\vec{w}, q) \in V \times W$,

$$\begin{aligned} \frac{1}{2} \{a(\vec{w}, \vec{w}) + d(q, q)\} - R[(\vec{w}, q)] &= \frac{1}{2} \{a(\vec{w} - \vec{\phi}, \vec{w} - \vec{\phi}) + d(q - \psi, q - \psi) - a(\vec{\phi}, \vec{\phi}) - d(\psi, \psi)\} \\ &\geq -\frac{1}{2} \{a(\vec{\phi}, \vec{\phi}) + d(\psi, \psi)\} \\ &= -\frac{1}{2} (\|\vec{\phi}\|_V^2 + \|\psi\|_W^2). \end{aligned} \quad (5.33)$$

Therefore,

$$\begin{aligned} -\frac{1}{2} (\|\vec{\phi}\|_V^2 + \|\psi\|_W^2) &= \inf_{(\vec{w}, q) \in V(P) \times W(P)} \sup_{\mu \in H(\text{div}, \Omega)} L[(\vec{w}, q), \mu] \\ &= \sup_{\mu \in H(\text{div}, \Omega)} \inf_{(\vec{w}, q) \in V(P) \times W(P)} L[(\vec{w}, q), \mu] \\ &\geq \inf_{(\vec{w}, q) \in V(P) \times W(P)} L[(\vec{w}, q), \mu] \\ &= \sum_{K \in P} \inf_{\vec{w}_K \in V_K} \left\{ \frac{1}{2} a(\vec{w}_K, \vec{w}_K) - l_K(\vec{w}_K) + a_K(\vec{u}_h, \vec{w}_K) \right. \\ &\quad \left. + b_K(\vec{w}_K, p_h) + c_K(\vec{u}_h, \vec{u}_h, \vec{w}_K) - \oint_{\partial K} \vec{n}_K \cdot \sigma(\vec{u}_h, p_h) \cdot \vec{w}_K ds - \frac{1}{2} d_K(\nabla \cdot \vec{u}_h, \nabla \cdot \vec{u}_h) \right\}. \end{aligned} \quad (5.34)$$

Using (5.34), we obtain:

Theorem 5.4 *Let $J_K : V_K \rightarrow \mathbb{R}$ be a quadratic functional*

$$\begin{aligned} J_K(\vec{w}_K) &= \frac{1}{2} a(\vec{w}_K, \vec{w}_K) - l_K(\vec{w}_K) + a_K(\vec{u}_h, \vec{w}_K) + b_K(\vec{w}_K, p_h) + c_K(\vec{u}_h, \vec{u}_h, \vec{w}_K) \\ &\quad - \oint_{\partial K} \vec{n}_K \cdot \sigma(\vec{u}_h, p_h) \cdot \vec{w}_K ds. \end{aligned} \quad (5.35)$$

Then

$$\|\vec{\phi}\|_V^2 + \|\psi\|_W^2 \leq \sum_{K \in P} \{-2 \inf_{\vec{w}_K \in V_K} J_K(\vec{w}_K) + d_K(\nabla \cdot \vec{u}_{h,K}, \nabla \cdot \vec{u}_{h,K})\}. \quad (5.36)$$

□

We have the problems on each subdomain

$$\inf_{\vec{w}_K \in V_K} J_K(\vec{w}_K). \quad (5.37)$$

Suppose that the minimum exists, then the minimising element is characterized by finding $\vec{\phi}_K \in V_K$ such that

$$a(\vec{\phi}_K, \vec{v}) = l_K(\vec{v}) - a_K(\vec{u}_h, \vec{v}) - b_K(\vec{u}_h, p_h) - c_K(\vec{u}_h, \vec{u}_h, \vec{v}) + \oint_{\partial K} \langle \vec{n}_K \cdot \sigma(\vec{u}_h, p_h) \cdot \vec{v} \rangle d\mathbf{s} \quad (5.38)$$

for all $\vec{v} \in V_K$.

The necessary and sufficient conditions for the existence of a minimum are that the data satisfy the following equilibration condition:

$$0 = l_K(\vec{\theta}) - a_K(\vec{u}_h, \vec{\theta}) - b_K(\vec{\theta}, p_h) - c_K(\vec{u}_h, \vec{u}_h, \vec{\theta}) + \oint_{\partial K} \langle \vec{n}_K \cdot \sigma(\vec{u}_h, p_h) \rangle \cdot \vec{\theta} \, ds, \quad (5.39)$$

for all $\vec{\theta} \in \text{Ker}[a, V_K]$,

where

$$\text{Ker}[a, V_K] = \{ \vec{\theta} \in V_K : a_K(\vec{w}, \vec{\theta}) = 0 \text{ for all } \vec{w} \in V_K \}. \quad (5.40)$$

When the subdomain K lies on the boundary $\partial\Omega$ the local problem (5.38) will be subject to a homogeneous Dirichlet condition on a portion of their boundaries and thus will be automatically well posed. However, elements away from the boundary are subject to pure Neumann conditions and the null space of the operator $a(\cdot, \cdot, \cdot)$ will contain the rigid motions

$$\text{Ker}[a, V_K] = \text{Span}\{ \vec{\theta}_1, \vec{\theta}_2 \}, \quad (5.41)$$

$$\text{where } \vec{\theta}_1 = \begin{pmatrix} 1 \\ 0 \end{pmatrix}, \quad \vec{\theta}_2 = \begin{pmatrix} 0 \\ 1 \end{pmatrix}. \quad (5.42)$$

We construct data which satisfy the condition (5.39). We define

$$\begin{pmatrix} \lambda_{KJ}^{(1)} & 0 \\ 0 & \lambda_{KJ}^{(2)} \end{pmatrix} = \begin{pmatrix} \lambda_{JK}^{(1)} & 0 \\ 0 & \lambda_{JK}^{(2)} \end{pmatrix} - \frac{1}{2} \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}. \quad (5.43)$$

Using (5.21), we obtain

$$\begin{pmatrix} \lambda_{KJ}^{(1)} & 0 \\ 0 & \lambda_{KJ}^{(2)} \end{pmatrix} + \begin{pmatrix} \lambda_{JK}^{(1)} & 0 \\ 0 & \lambda_{JK}^{(2)} \end{pmatrix} = \begin{pmatrix} 0 & 0 \\ 0 & 0 \end{pmatrix}. \quad (5.44)$$

The averaged interelement stress may be rewritten

$$\langle \vec{n}_K \cdot \sigma(\vec{w}_h, q_h) \rangle = \langle \vec{n}_K \cdot \sigma(\vec{v}_h, q_h) \rangle_{\frac{1}{2}} + [[\vec{n} \cdot \sigma(\vec{v}_h, q_h)]] \begin{pmatrix} \lambda_{KJ}^{(1)} & 0 \\ 0 & \lambda_{KJ}^{(2)} \end{pmatrix}, \quad (5.45)$$

where $\langle \vec{n}_K \cdot \sigma(\vec{v}_h, q_h) \rangle_{\frac{1}{2}}$ denotes the interelement averaged stress obtained using the symmetrical weighting corresponding to $\alpha = \frac{1}{2}$. Then

$$\begin{aligned} l_K(\vec{\theta}) - a_K(\vec{u}_h, \vec{\theta}) - b_K(\vec{\theta}, p_h) - c_K(\vec{u}_h, \vec{u}_h, \vec{\theta}) + \oint_{\partial K} \langle \vec{n}_K \cdot \sigma(\vec{u}_h, p_h) \rangle \cdot \vec{\theta} \, ds \\ = - \sum_{J \in P} \int_{\Gamma_{KJ}} [[\vec{n} \cdot \sigma(\vec{v}_h, p_h)]] \begin{pmatrix} \lambda_{KJ}^{(1)} & 0 \\ 0 & \lambda_{KJ}^{(2)} \end{pmatrix} \vec{\theta} \, ds, \end{aligned} \quad (5.46)$$

for all $\vec{\theta} \in \text{Ker}[a, V_K]$.

Let $\{X_A\}$ be chosen so that: $\text{Span}\{X_A\} \times \text{Span}\{X_A\} \subset X$ and

$$\sum_A X_A(x) = 1. \quad (5.47)$$

For example, one might choose the piecewise bilinear pyramid functions associated with interior nodes in the partition. The relation (5.47) must hold at all points x contained in elements which do not interest the boundary of the domain.

The functions $\lambda_{KJ}^{(k)} : \Gamma_{KJ} \rightarrow \mathbb{R}$ are chosen to be of the form

$$\lambda_{KJ}^{(k)}(s) = \sum_A \lambda_{KJ,A}^{(k)} X_A(s), \quad (5.48)$$

where $\lambda_{KJ,A}^{(k)}$ are constants to be determined. Owing the constraint (5.44), it is required that

$$\lambda_{KJ,A}^{(k)} + \lambda_{JK,A}^{(k)} = 0, \quad (5.49)$$

for each A .

Lemma 2. Suppose that for each X_A the constants $\{\lambda_{KJ,A}^{(k)}\}$ satisfy

$$-\sum_{J \in P} \lambda_{KJ,A}^{(k)} \rho_{KJ,A}^{(k)} = b_{K,A}^{(k)}, \quad (5.50)$$

for $k=1, 2$, where

$$\begin{aligned} b_{K,A}^{(k)} = & l_K(X_A \vec{\theta}_k) - a_K(\vec{u}_h, X_A \vec{\theta}_k) - b_K(X_A \vec{\theta}_k, p_h) - c_K(\vec{u}_h, \vec{u}_h, X_A \vec{\theta}_k) \\ & + \oint_{\partial K} X_A(s) \langle \vec{n}_K \cdot \sigma(\vec{u}_h, p_h) \rangle \cdot \vec{\theta}_k ds, \end{aligned} \quad (5.51)$$

and

$$\rho_{KJ,A}^{(k)} = \int_{\Gamma_{KJ}} [[\vec{n} \cdot \sigma(\vec{u}_h, p_h)]] \cdot \vec{\theta}_k ds. \quad (5.52)$$

Then

$$0 = l_K(\vec{\theta}) - a_K(\vec{u}_h, \vec{\theta}) - b_K(\vec{\theta}, p_h) - c_K(\vec{u}_h, \vec{u}_h, \vec{\theta}) + \oint_{\partial K} \langle \vec{n}_K \cdot \sigma(\vec{u}_h, p_h) \rangle \cdot \vec{\theta} ds, \quad (5.53)$$

for all $\vec{\theta} \in \text{Ker}[a, V_K]$.

Proof. The result follows immediately by using (5.50), (5.48) and 5.44).

Summarizing and incorporating the results of section 5 we have

Theorem 5.5 *Let the conditions of Theorem 1 hold. Then there exists a constant $C > 0$ such that*

$$\|\vec{u} - \vec{u}_h\|_V^2 + \|p - p_h\|_W^2 \leq C \sum_{K \in P} \eta_K^2, \quad (5.54)$$

where

$$\eta_K = \{a_K(\vec{\phi}_K, \vec{\phi}_K) + d_K(\nabla \cdot \vec{u}_h, \nabla \cdot \vec{u}_h)\}^{\frac{1}{2}}. \quad (5.55)$$

□

We define the global error estimator η by

$$\eta = \left(\sum_{K \in P} \eta_K^2 \right)^{\frac{1}{2}}. \quad (5.56)$$

We define the stress jump across edge or face E adjoining elements T and K

$$[[\nu \nabla \vec{u}_h - p_h \vec{I}]] = ((\nu \nabla \vec{u}_h - p_h \vec{I})|_T - (\nu \nabla \vec{u}_h - p_h \vec{I})|_K) \vec{n}_{E,K},$$

where $\vec{n}_{E,K}$ is the outward pointing normal.

We define the equidistributed stress jump operator

$$\vec{R}_E^* = \begin{cases} \frac{1}{2}[\nu \nabla \vec{u}_h - p_h I] & \text{if } E \in \varepsilon_{h,\Omega}, \\ \vec{g} - [\alpha \vec{u}_h + (\nu \nabla \vec{u}_h - p_h I) \vec{n}] & \text{if } E \in \varepsilon_{h,\Gamma}, \end{cases} \quad (5.57)$$

and the interior residuals

$$\vec{R}_K = \{ \vec{f} + \nu \nabla^2 \vec{u}_h - \vec{u}_h \cdot \nabla \vec{u}_h - \nabla p_h \}_K, \quad (5.58)$$

and

$$R_K = \{ \nabla \cdot \vec{u}_h \}_K. \quad (5.59)$$

The element contribution $\eta_{r,K}$ of the residual error estimator is given by

$$\eta_{r,K}^2 = h_K^2 \|\vec{R}_K\|_{0,K}^2 + \|R_K\|_{0,K}^2 + \sum_{E \in \partial K} h_E \|\vec{R}_E^*\|_{0,E}^2, \quad (5.60)$$

and the global residual error estimator η_r is given by

$$\eta_r = (\sum_{K \in P} \eta_{r,K}^2)^{\frac{1}{2}}.$$

Theorem 5.6 *The estimator $\eta_{r,K}$ is equivalent to the η_K estimator : there exist positive constants c_1 and C_2 such that*

$$c_1 \eta_K \leq \eta_{r,K} \leq C_2 \eta_K. \quad (5.61)$$

Proof. Same steps of the prof of Theorem 3.9 in [44].

Theorem 5.7 *There exist positive constant C' such that*

$$\|\vec{u} - \vec{u}_h\|_V^2 + \|p - p_h\|_W^2 \leq C' \sum_{K \in P} \eta_{r,K}^2. \quad (5.62)$$

6 Numerical examples

In this section some numerical results of calculations with finite element method and ADINA system will be presented. Using our solver, we run the test problem driven cavity flow [37, 38, 39, 40, 41, 42, 43,].

This is a classic test problem used in fluid dynamics, known as driven-cavity flow. It is a model of the flow in a square cavity with the lid moving from left to right. Let the computational model:

$\{y = 1, -1 \leq x \leq 1 / u_x = 1\}$ a leaky cavity.

The streamlines are computed from the velocity solution by solving the Poisson equation numerically subject to a zero Dirichlet boundary condition.

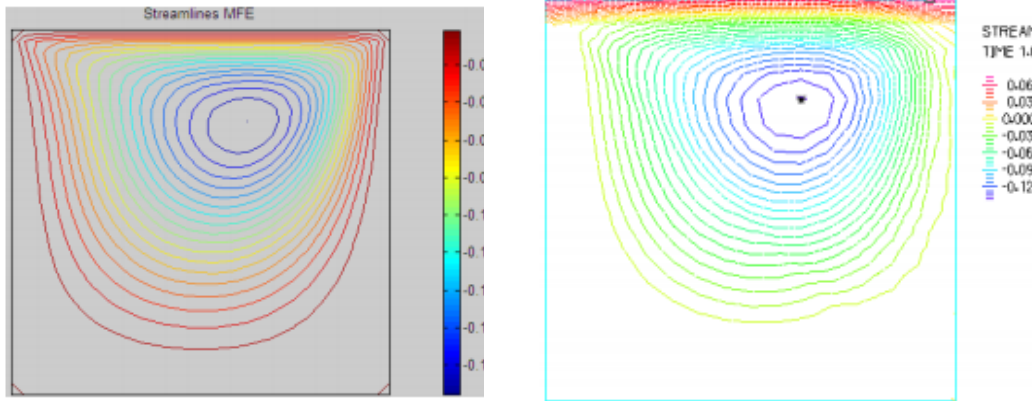


Fig. 1. Uniform streamline plot with MFE (left), and uniform streamline plot computed with ADINA system (right) using $Q_1 - P_0$ approximation, a 32×32 square grid and Reynolds number $Re=100$.

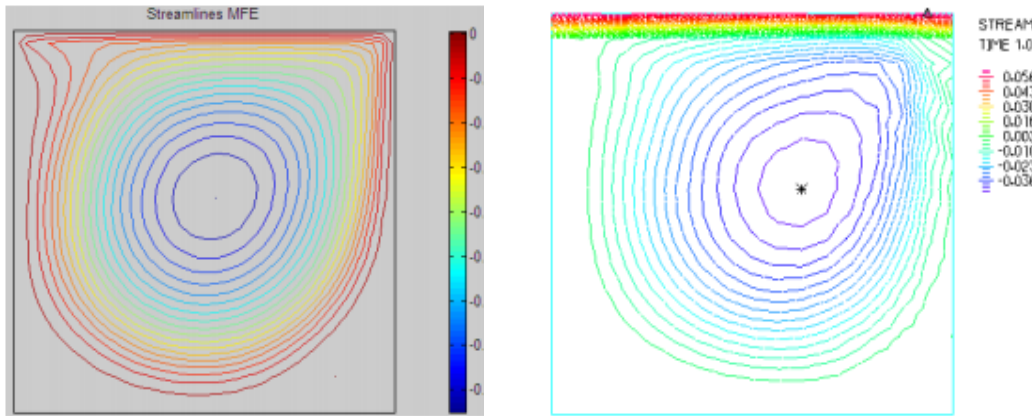


Fig. 2. Uniform streamline plot with MFE (left), and uniform streamline plot computed with ADINA system (right) using $Q_1 - P_0$ approximation, a 32×32 square grid and Reynolds number $Re=2000$.

The solution shown in figure 1 corresponds to a Reynolds number of 100. The particles in the body of the fluid move in a circular trajectory.

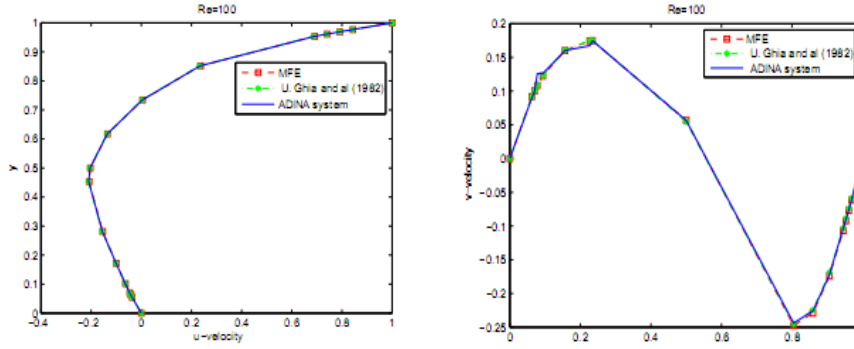


Fig. 3. Velocity component u at vertical center line (left plot), and the velocity component v at horizontal center line (right plot) with a 129×129 grid and $Re=100$.

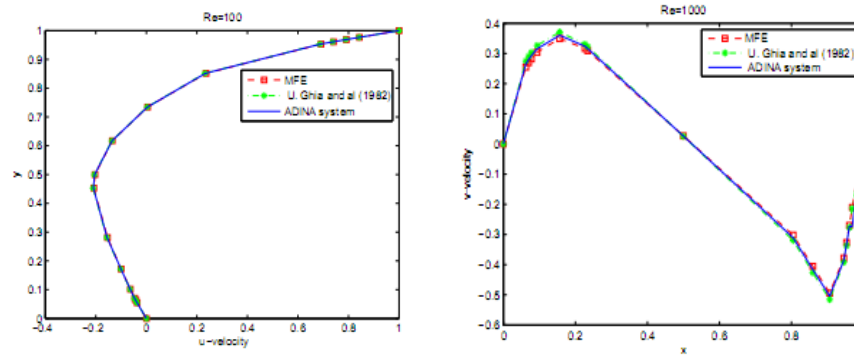


Fig. 4. Velocity component u at vertical center line (left plot), and the velocity component v at horizontal center line (right plot) with a 129×129 grid and $Re=1000$.

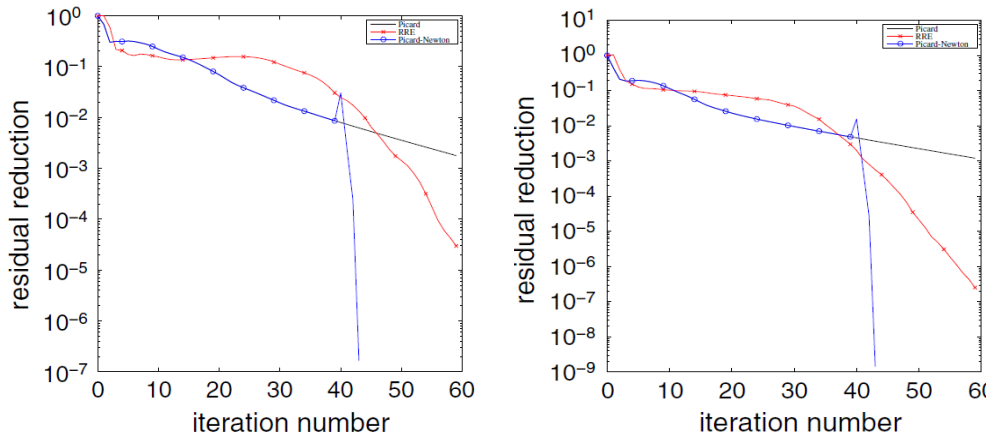


Fig. 5. Nonlinear convergence for $Re = 600$ with $Q_2 - P_{-1}$ (left), and and stabilized $Q_1 - P_0$ (right).

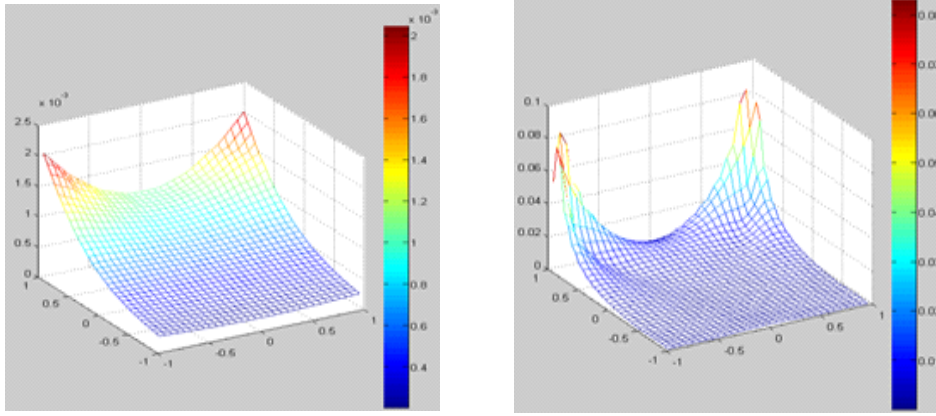


Fig. 6. local Poisson problem error estimator η (left) and residual error estimator η_r (right) for leaky driven cavity, with 32×32 square grid and $Re=600$.

grid	$\ \vec{u} - \vec{u}_h\ _V$	η_r	η
8×8	8.704739×10^{-2}	1.720480×10^0	9.722432×10^{-1}
16×16	3.115002×10^{-2}	1.084737×10^0	5.052819×10^{-1}
32×32	9.545524×10^{-3}	5.919904×10^{-1}	2.782035×10^{-1}
64×64	2.676623×10^{-3}	3.160964×10^{-1}	1.220784×10^{-1}

Table 1. η_r is the residual error estimator and η is the local Poisson problem error estimator for leaky driven cavity, with Reynolds number $Re = 600$.

The solution shown in Figure 2 corresponds to a Reynolds number of 2000. The particles in the body of the fluid move in a circular trajectory. Steady flow in a two dimensional cavity is not stable for Reynolds number much greater than 10^4 . Indeed, we have made calculations for Reynolds number 10^4 . In addition, our code does not converge because the turbulence phenomena is not taken into account in our model. At a critical Reynolds number (approximately 13,000) the flow pattern develops into a time-periodic state with "waves" running around the cavity walls.

The profiles of the u-velocity component along the vertical center line and the v-velocity component along the horizontal center line are shown in Figures 3 and 4 for $Re=100$ and $Re=1000$, respectively.

In these figures, we have also included numerical predictions from [42] and ADINA system. There is an excellent agreement between the computed results, those published in [42] and the results computed with ADINA system.

Figure 5 show the evolution of the nonlinear residual norm, using a logarithmic scale, for the simple Picard method, the Picard-Newton method and reduced rank extrapolation method (RRE), for two types of finite element discretization: a high order $Q_2 - P_{-1}$ solution and a low order $Q_1 - P_0$ solution. We observe that the RRE method can be seen to accelerate the the

fixed-point (Picard) iteration.

The computational results of Figure 6 and Table 1 suggest that all two estimators seem to be able to correctly indicate the structure of the error.

7 Conclusion

We were interested in this work in the numeric solution for two dimensional partial differential equations modelling (or arising from) model steady incompressible fluid flow with a new boundary condition. It includes algorithms for discretization by finite element methods and a posteriori error estimation of the computed solutions. We use a reduced rank extrapolation method for computing numerical solutions of the steady-state Navier-Stokes equations. RRE is an effective techniques that have been used in accelerating the convergence of vector sequences. Two types of a posteriori error indicator are introduced and are shown to give global error estimates that are equivalent to the true discretization error. The computational results suggest that all two estimators seem to be able to correctly indicate the structure of the error.

Acknowledgments

The authors would like to express their sincere thanks for the referee for his/her helpful suggestions.

References

- [1] Brezzi F, Fortin M (1991) Mixed and Hybrid Finite Element Method, Springer Verlag; New York.
- [2] Roberts J, Thomas JM (1989) Mixed and Hybrid methods, Handbook of numerical analysis II, Finite element methods 1, Ciarlet P and Lions J, Amsterdam.
- [3] Chavent G, Jaffré J (1986) Mathematical Models and Finite Elements for Reservoir Simulation, Elsevier Science Publishers B.V, Netherlands.
- [4] Ainsworth M, Oden J (1997) A posteriori error estimates for Stokes and Oseen equations, SIAM J Numer Anal 34:228-245.
- [5] Ainsworth M, Oden J (2000) A Posteriori Error Estimation in Finite Element Analysis, Wiley, New York, [264, 266, 330, 334, 335].
- [6] Verfurth R (1996) A Review of a posteriori Error Estimation and Adaptive Mesh-Refinement Techniques, Wiley-Teubner, Chichester.
- [7] Bank RE, Welfert B (1991) A posteriori error estimates for the Stokes problem. SIAM J Numer Anal 28:59-623.
- [8] Verfurth R (1989) A posteriori error estimators for the Stokes equations. Numer Math 55:309-325.
- [9] J. Oden, W. Wu, Ainsworth M (1994) An a posteriori error estimate for finite element approximations of the Navier-Stokes equations. Comput Methods Appl Mech Engrg 111:185-202.
- [10] Elman HC, Silvester DJ, Wathen AJ (2005) Finite Elements and Fast Iterative Solvers with Applications in Incompressible Fluid Dynamics, Oxford University Press.
- [11] John V (2001) Residual a posteriori error estimates for two-level finite element methods for the Navier-Stokes equations. Appl Numer Math 37:503-518.
- [12] Carstensen C, Funken SA (2001) A posteriori error control in low-order finite element discretisations of incompressible stationary flow problems. Math Comp 70:1353-1381.
- [13] Wu DH, Currie IG (2001) Analysis of a posteriori error indicator in viscous flows. Int J Num Meth Heat Fluid Flow 12:306-327.
- [14] Elakkad A, Elkhalfi A, Guessous N (2011) An a posteriori error estimate for mixed finite element approximations of the Navier-Stokes equations. Journal of the Korean Mathematical Society 48:529-550.
- [15] Zhang T, Zhao X, Lei G (2013) A posteriori error estimates of stabilized finite element method for the steady Navier-Stokes problem. Applied Mathematics and Computation 219:9081-9092.

- [16] Bao W, Barrett JW (1998) A priori and a posteriori error bounds for a non conforming linear finite element approximation of a Non-Newtonian flow. *Mathematical Modelling and Numerical Analysis* 32: 843-858.
- [17] Cabay S, Jackson, LW (1976) A polynomial extrapolation method for finding limits and antilimits for vector sequences. *SIAM J Numer Anal* 13:734-752.
- [18] Eddy RP (1979) Extrapolation to the limit of a vector sequence. In: Wang, P.C.C. (ed.) *Information Linkage Between Applied Mathematics and Industry*. Academic Press, New-York, pp 387-396.
- [19] Mesina M (1977) Convergence acceleration for the iterative solution of $x = Ax + f$. *Comput Methods Appl Mech Eng* 10:165-173.
- [20] Sidi A, Ford WF, Smith DA (1986) Acceleration of convergence of vector sequences. *SIAM J Numer Anal* 23:178-196.
- [21] Brezinski C (1975) Généralisation de la transformation de Shanks, de la table de Pade et de lepsilon-algorithm. *Calcolo* 12:317-360.
- [22] Pugatchev BP (1978) Acceleration of the convergence of iterative processes and a method for solving systems of nonlinear equations. *USSR. Comput Math Math Phys* 17:199-207.
- [23] Sidi A (1991), Efficient implementation of minimal polynomial and reduced rank extrapolation methods. *J Comput Appl Math* 36:305-337.
- [24] Jbilou K, Sadok H (1995) Analysis of some vector extrapolation methods for linear systems. *Numer Math* 70:73-89.
- [25] Sidi A (1988) Extrapolation vs. projection methods for solving linear systems of equations. *J Comput Appl Math* 22:71-88.
- [26] Saad Y (1981) Krylov subspace methods for solving large unsymmetric linear systems. *Math Comput* 37:105-126.
- [27] Saad Y, Schultz MH (1986) GMRES: a generalized minimal residual algorithm for solving nonsymmetric linear systems. *SIAM J Sci Stat Comput* 7:856-869.
- [28] Duminil S, Sadok H (2011) Reduced rank extrapolation applied to electronic structure computations. *Electron Trans Numer Anal* 38:347-362.
- [29] Jbilou K, Reichel L, Sadok H (2009) Vector extrapolation enhanced TSVD for linear discrete ill-posed problems. *Numer Algorithm* 51:195-208.
- [30] Jbilou K, Sadok H (1991) Some results about vector extrapolation methods and related fixed point iterations. *J Comput Appl Math* 36:385-398.
- [31] Jbilou K, Sadok H (2000) Vector extrapolation methods. Applications and numerical comparison. *J Comput Appl Math* 122:149-165.
- [32] Smith DA, Ford WF (1987) A. Sidi, Extrapolation methods for vector sequences. *SIAM Rev* 29:199-233.
- [33] Brezinski C, Zaglia MR (1991) *Extrapolation Methods Theory and Practice*. North-Holland, Amsterdam.
- [34] Gresho PM and Sani RL (1998) *Incompressible flow and the finite element method*, John Wiley and Sons.
- [35] Girault V, Raviart PA (1986) *Finite Element Methods for Navier-Stokes Equations*, Springer-Verlag, Berlin.
- [36] Duminil S, Sadok H, Silvester D (2014) Fast solvers for discretized Navier-Stokes problems using vector extrapolation. *Numer Algor* 66:89-104.
- [37] Erturk E, Corke TC and Gokcol C (2005) Numerical solutions of 2-D steady incompressible driven cavity flow at high Reynolds numbers. *Int J Numer Meth Fluids* 48:747-774.
- [38] Garcia S (2007) *The Lid-Driven Square Cavity Flow: from Stationary to Time Periodic and Chaotic*. *Commun Comput Phys* 2:900-932.
- [39] Gresho PM, Sani RL (1998) *Incompressible Flow and The finite element Method*, John Wiley and Sons.
- [40] Elman HC (1999) Preconditioning for the steady state Navier-Stokes equations with low viscosity. *SIAM J Sci Comp* 20:1299-1316.
- [41] Gauthier A, Saleri F, Veneziani A (2004) A fast preconditioner for the incompressible Navier-Stokes equations, *Comput Visual Sci* 6:105-112.
- [42] Ghia U, Ghia K, Shin C (1982) High Re solution for incompressible viscous flow using the Navier-Stokes equations and a multigrid method. *J Comput Phys* 48:387-395.
- [43] Benzi M and Liu J (2007) An efficient solver for the incompressible Navier-Stokes equations in rotation form. *SIAM J SCI Comput* 29:1959-1981.
- [44] Liao Q, Silvester D (2010) A simple yet effective a posteriori estimator for classical mixed approximation of Stokes equations. *Applied Numerical Mathematics* 62:1242-1256.

- [45] Raviart PA, Thomas JM (1977) A mixed finite element method for second order elliptic problems, in: Mathematical Aspects of Finite Element Method, Lecture Notes in Mathematics, Springer, New York 606, pp 292-315.